

Visible Light Facial Recognition



Long range detection



Visible Light Facial Recognition



Live face detection



Touch screen



5" Capacitive LCD



200W Pixel




ID Card



WiFi BT

2 Million pixel wide angle dynamic camera




Face recognition speed is less than 0.2s

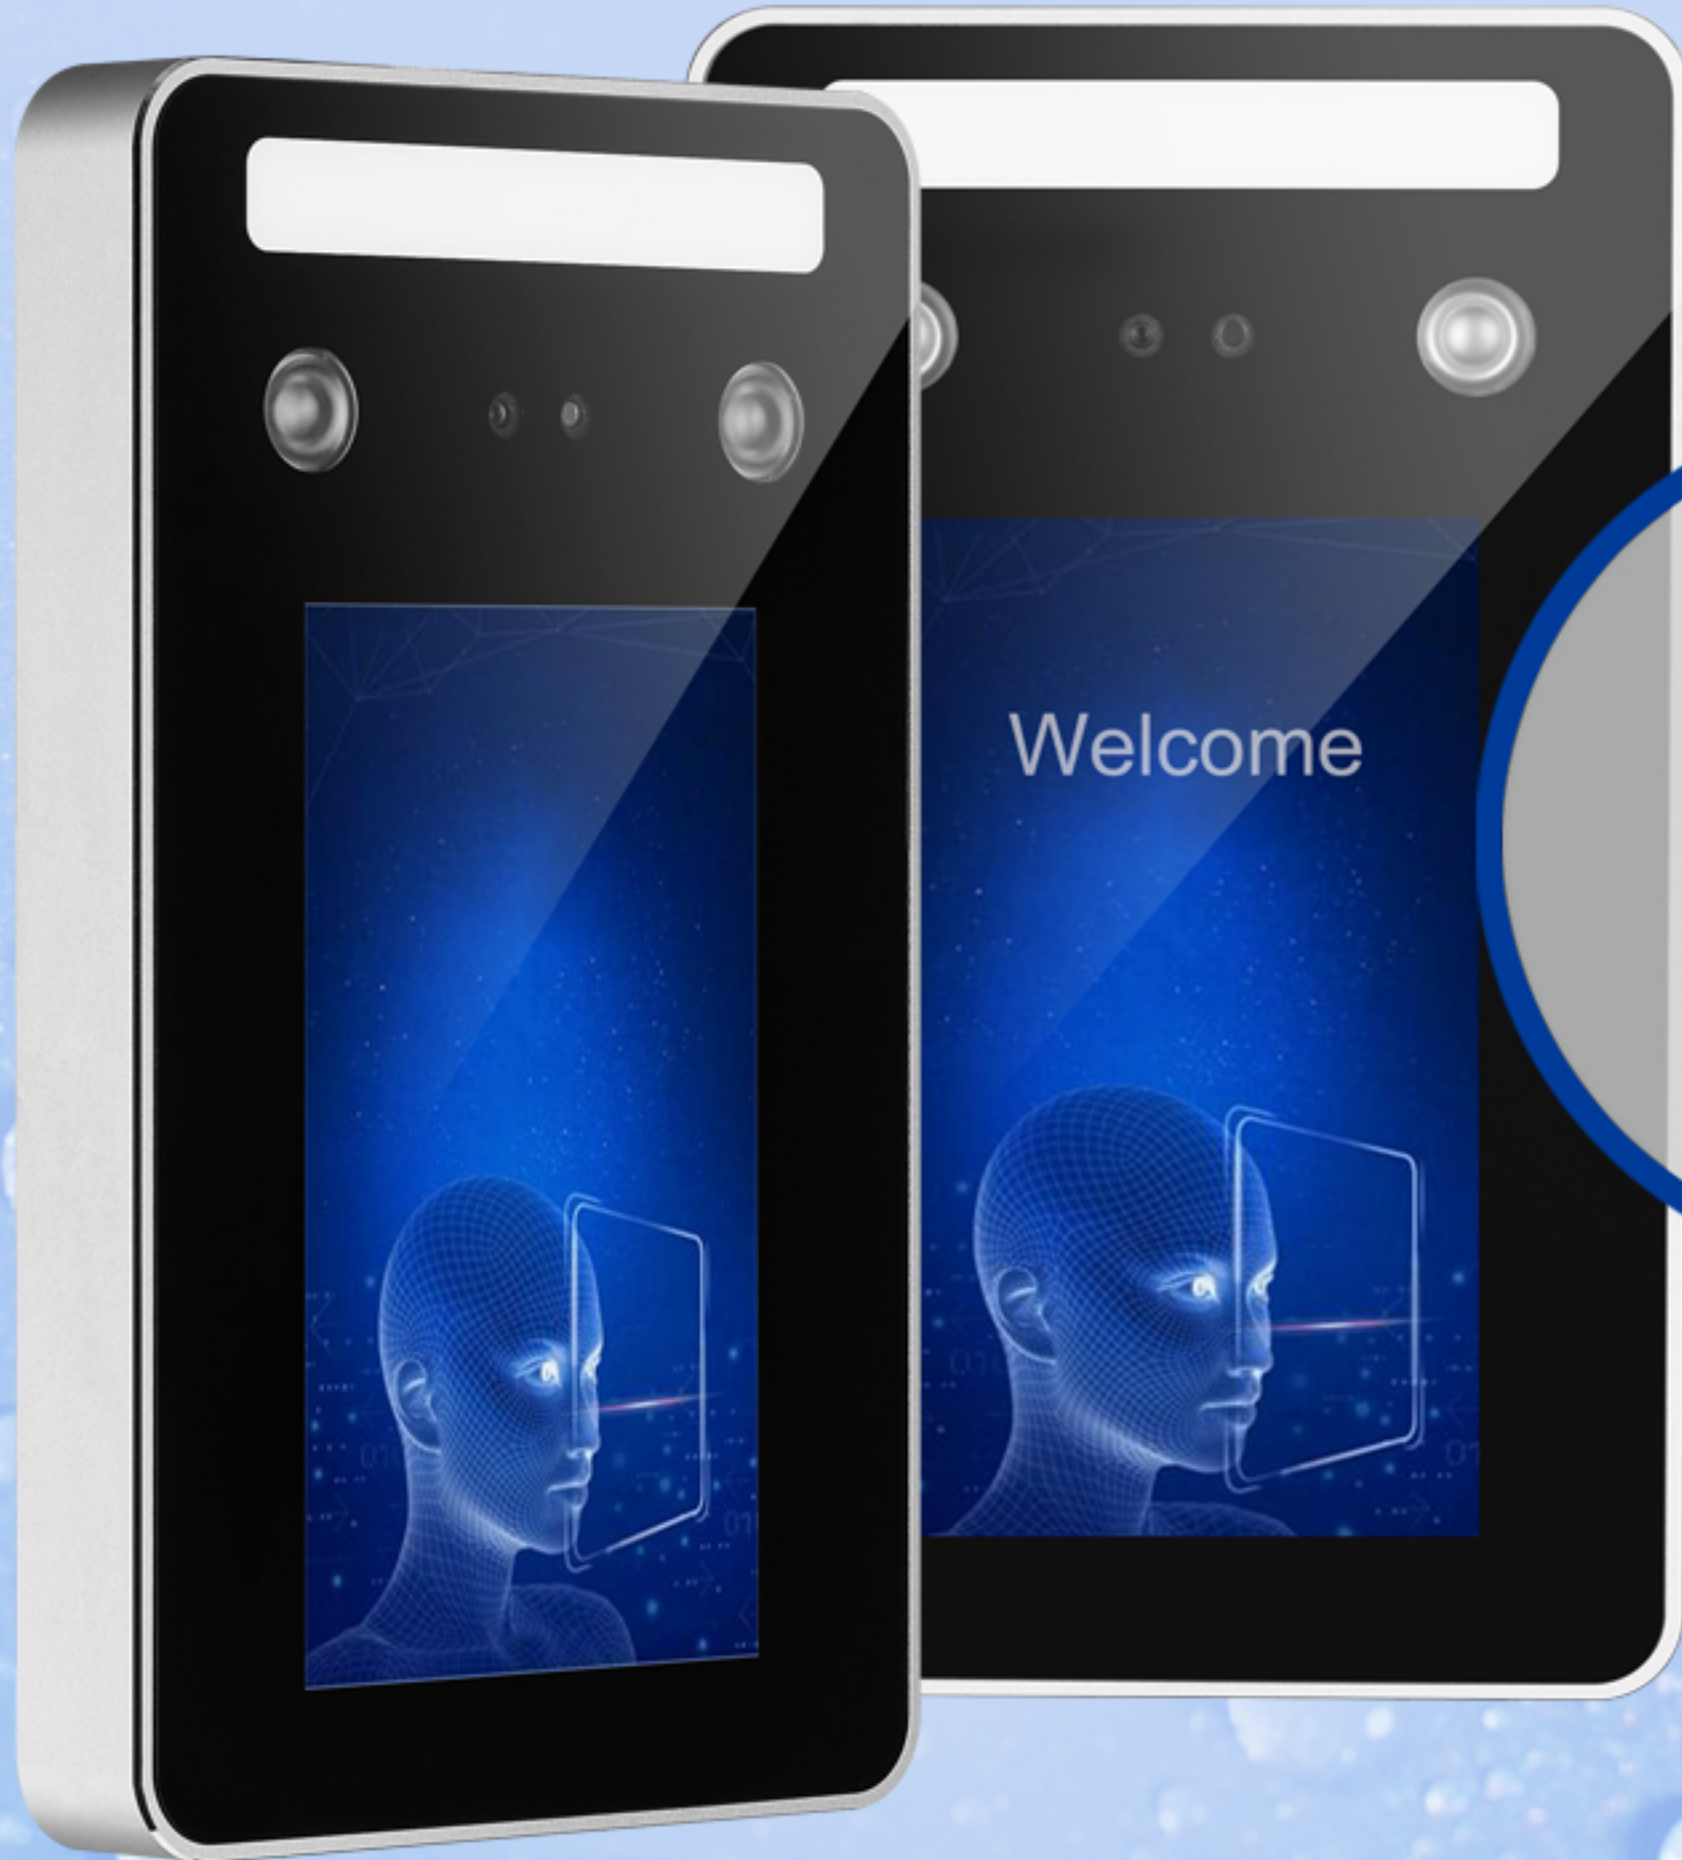

Face recognition time
<0.2S

5 inch touchable LCD display

5 inch touchable LCD display, real-time face show in prompt box, easy for user calibraton.

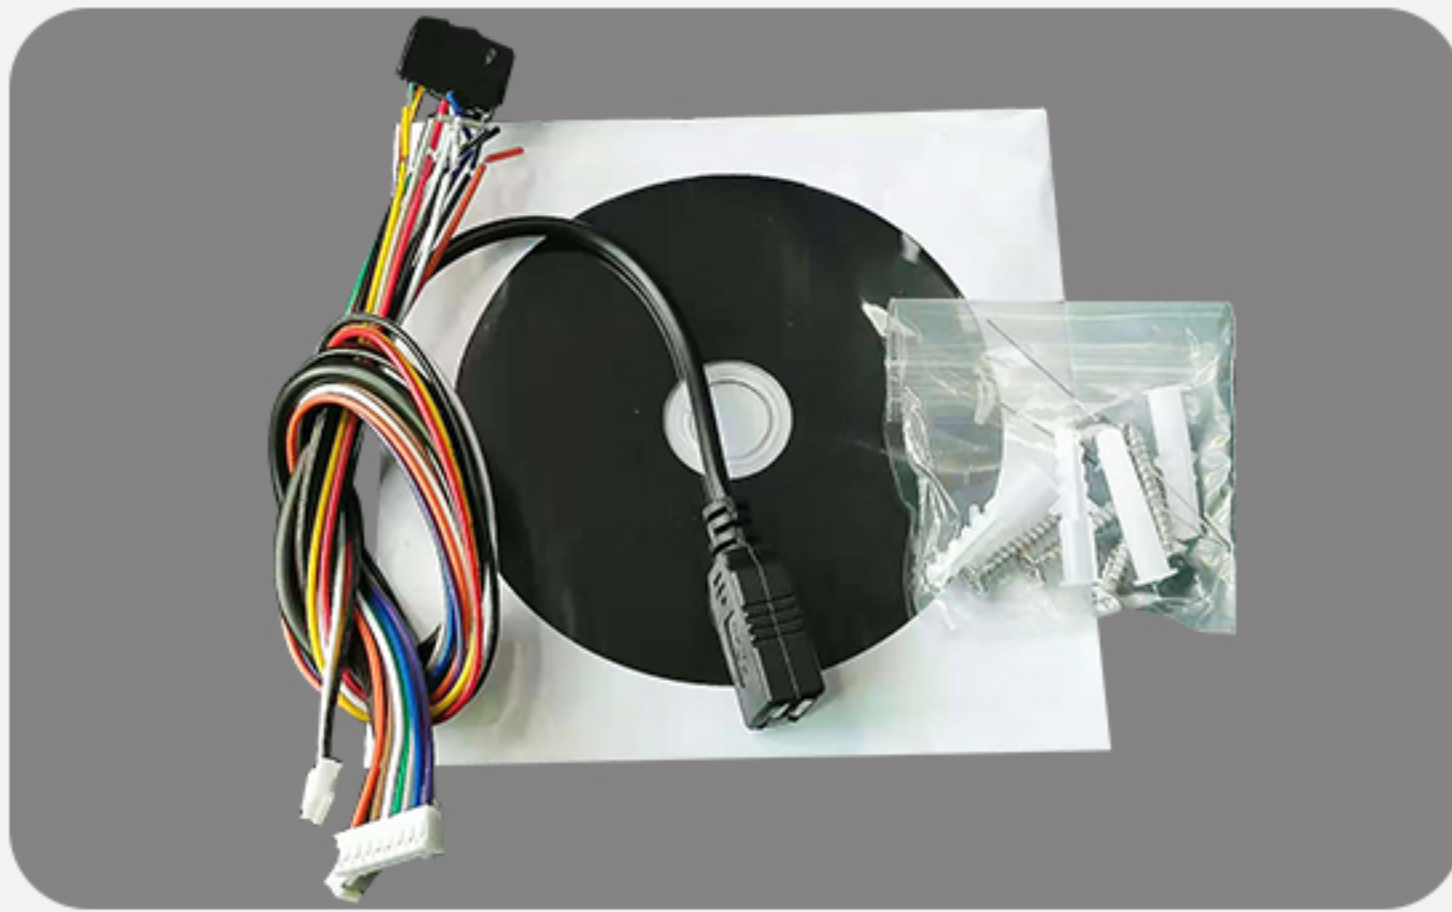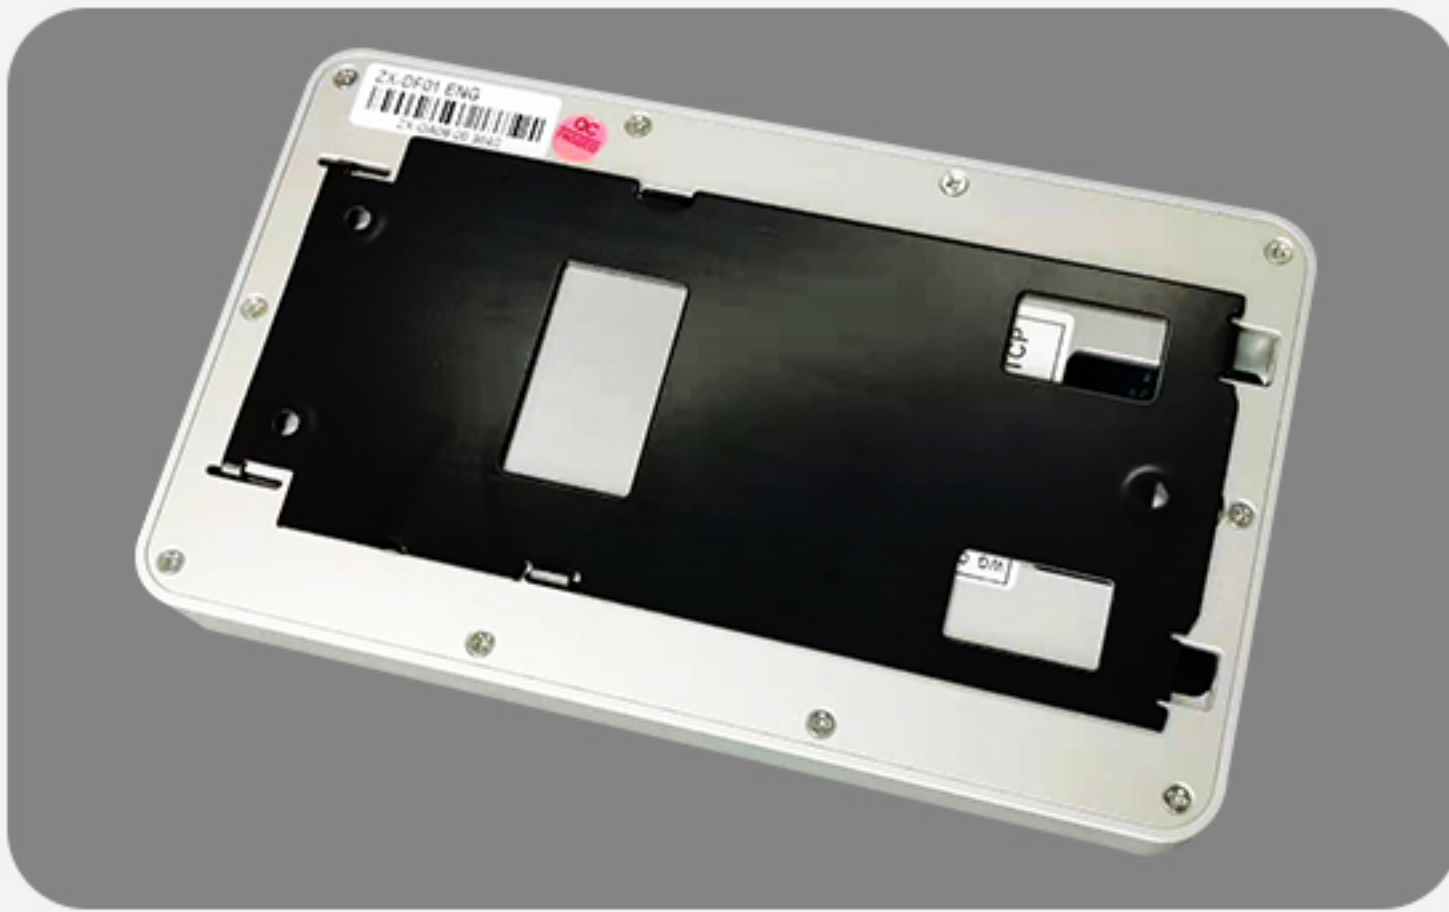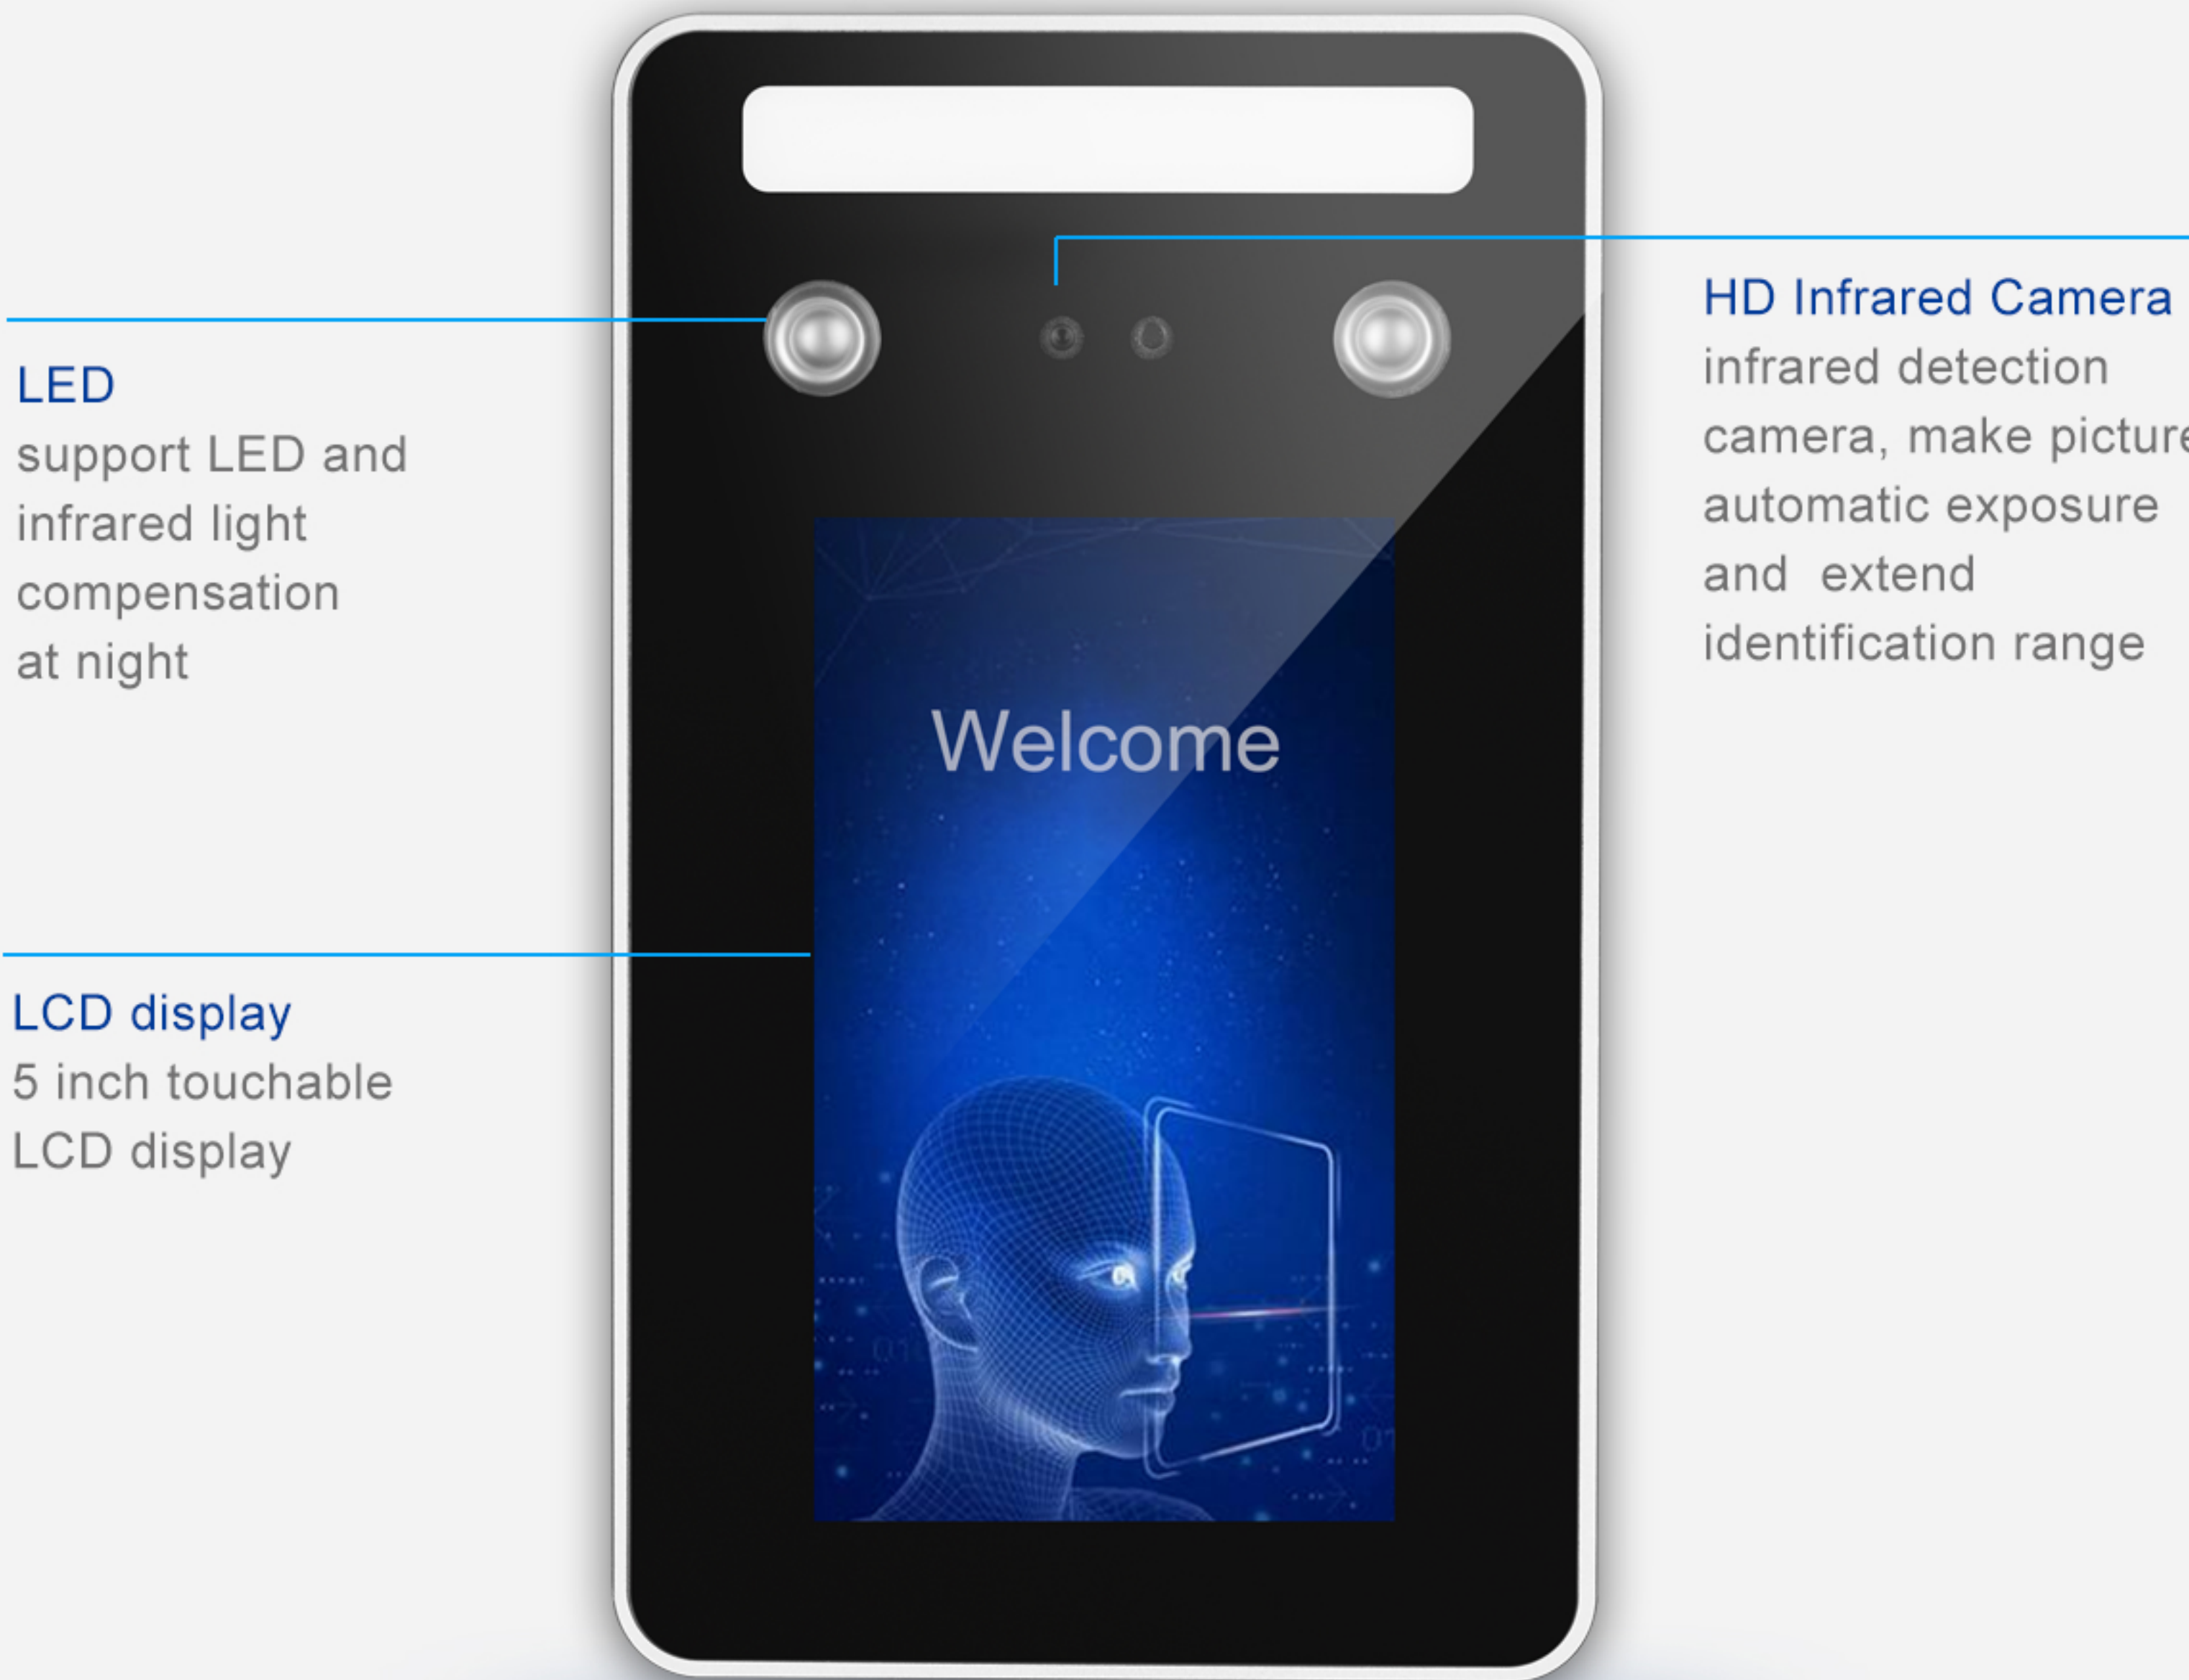

Specifications :

CPU	4 cores 1.2G
RAM	1G
ROM	8G
Camera	200W Pixel hd color camera, 100W Infrared camera
LED	LED Double high power infrared light
Display	5" Capacitive LCD touch screen
Resolution	800*480
Communication	TCP/IP, USB type-A, WIFI
FRR	≤0.1%
FAR	≤0.001%
Power supply	DC 12V, 2A
Operating temperature	-15°C - 60°C
Operating system	LINUX
Language	Chinese, English, Spanish, French, Turkish, Thai, Indonesian and more
User capacity	10000
Record Capacity	1,000,000
Identification style	Visible Light Facial Recognition, PIN, ID, face & PIN combination
Identification Mode	1:1, 1:N
Recognition	Name recognition, work number recognition
Face recognition time	<0.2S
Intelligent function	Live face detection
Detection rang	0.5-3m
Magnetic door	support
Alarm output	1 set
WG	1 set WG In, out
Dimension	185mm*110mm*20mm

