

TM-DF05T

is working for daily face identification attendance and access control monitoring by forehead temperature detection. Which can be widely used in the places like Hospital, Community, Park, Writing room, Campus, and different gathering zones etc.

Infrared temperature detection sensor

Precisely detect temperature, binocular seizing and live face identification

High Capacity user and logs

3000 Face and 1,000,000 Logs



Access Control Function


Professional access control with Wiegand input&Output

Attendance Function

Support USB Flash Driver Download for the excel files of detailed temperature detection record and attendance report

Communication method

Standard TCP/IP , WIFI and USB

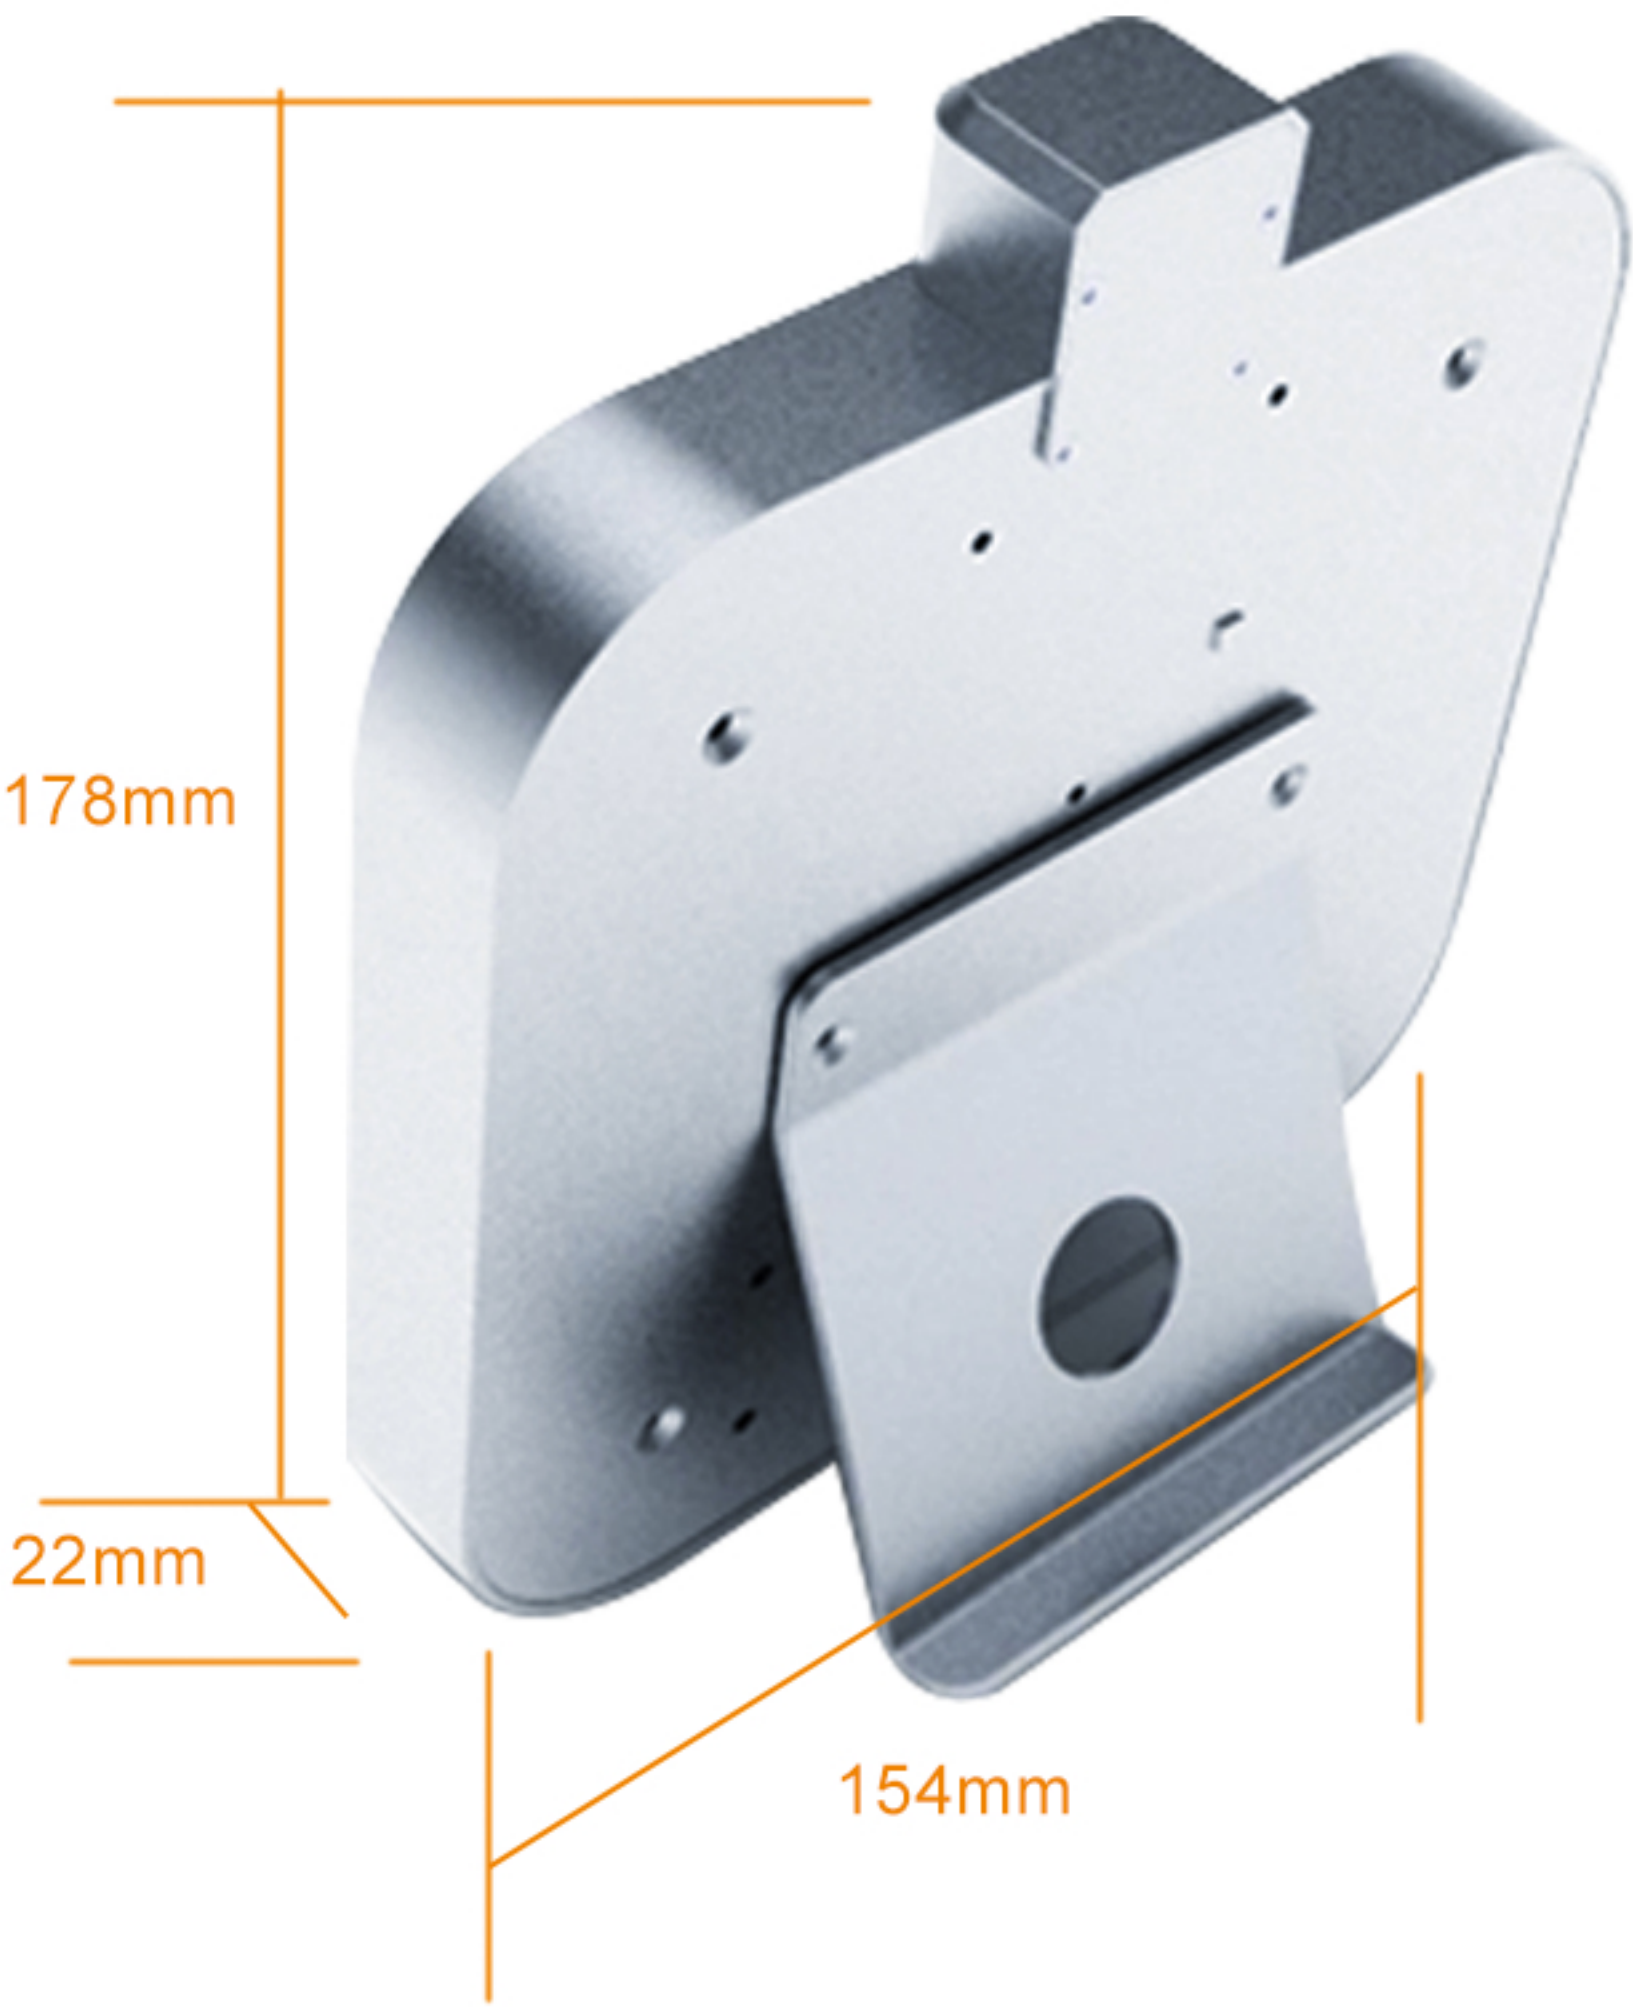

Support USB Flash Driver Download for the excel files of detailed temperature detection record and attendance report

Specifications

Product Model	Case Material	Plastic shell, Metal back plate	
Appearance	CPU Processor	4 Core 1.2G	
Temperature detection distance		0.5 meter;	
Temperature detection error		0.5℃,	
Temperature detection minimum unit		0.1℃	
Firmware Specification	RAM	4G DDR3	
	ROM	32G eMMC	
	Camera	200W Pixel HD Colorful Camera	
	Fill Light	100W Infrared Camera	
		Highlight LED Fill Light	
	Display Screen	Dual Infrared High Power Fill Light	
	Screen Resolution	5.0 inch Electronic Capacity Touch Screen	
	Keypad	854*480	
	Communication Method	Touch Virtual Keypad	
	FRR	TCP/IP,WIFI,USB PEN DRIVE	
	FAR	<= 0.1%	
	Product Size	<= 0.001%	
	Power Supply	154mm*152mm*22mm	
	Working Temperature	DC 12V, 2A	
	OS	-15℃ to 60℃	
	Language	LINUX System	
	User ID Capacity	Chinese, English and other languages(Customized)	
	Face Capacity	3000	
	User Record Capacity	3000	
	Identification Type	1,000,000	
	Face Recognition Mode	Dynamic Face Recognition, Password, Face Recognition& Password	
	Identification Display	1:1, 1:N	
	Face Recognition Time	Person Name& Number	
Interface Specification	Intelligent Function	Less than 0.2s	
	Face Recognition Distance	Infrared Live Person Identification Detection	
		Purely Dynamic Face Recognition	0.5-3m
		Infrared Live movement detection	
			0.5-1.5m
	Door Sensor	Support	
	Alarm output	1 set	
	Relay output	1 set	
	RS-232 output	1 set	
	RS-485 output	1 set	
	U-Disk output	1 set	
	Exit Switch	1 set	
	Wiegand Input	1 set WG26/34 Input	
	Wiegand Output	1 set WG26/34 Output	